




Distagon T* 1,4/35

Technical Specifications

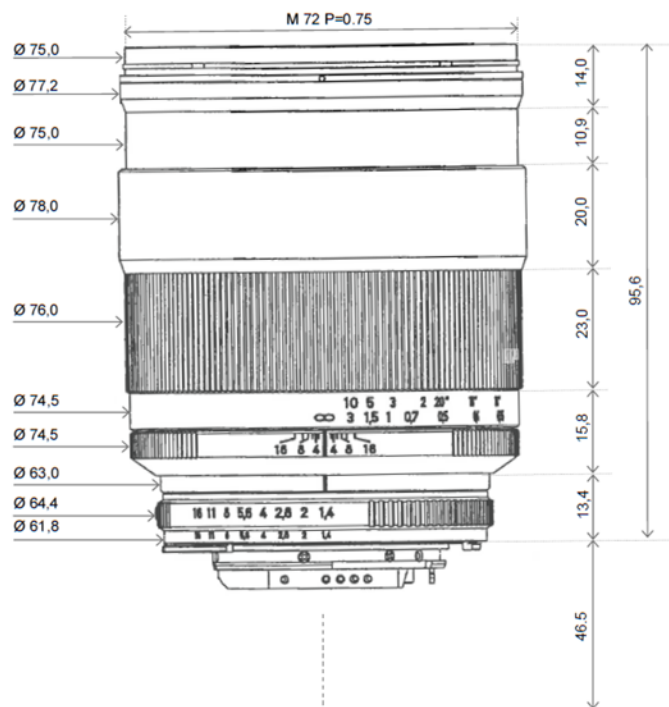


Focal length	35 mm
Aperture range	f/1.4 – f/16 (1/ 2 stop intervals)
Number of elements / groups	11 / 9
Min. working distance (object to sensor)	300 mm (1 ft.) – ∞
Min. free working distance	150 mm (0.5 ft.) – ∞
Angular field* (diag. / horiz. / vert.)	63 / 54 / 37°
Max. diameter of image field	43 mm (1.7")
Flange focal length	F-Mount: 46.5 mm (1.8"); M42-Mount: 45.5 mm
Coverage at close range	120 x 180 mm (4.7 x 7.0"), line 215 mm (8.4")
Image ratio at close range	1:5
Filter-thread	M 72 x 0.75
Weight	830 g (1.83 lbs.)
Camera mount	F bayonet, M42, EF

* referring to 35 mm format



Distagon T* 2/25

Technical Specifications

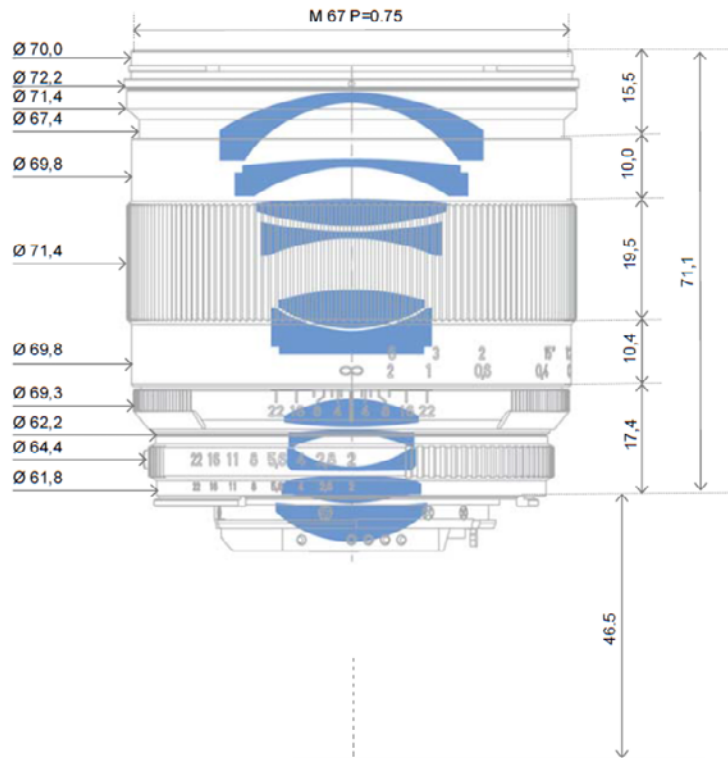


Focal length	25 mm
Aperture range	f/2 – f/22 (1/ 2 stop intervals)
Number of elements / groups	11 / 10
Min. working distance (object to sensor)	250 mm (0.83 ft.) – ∞
Min. free working distance	130 mm (0.43 ft.) – ∞
Angular field* (diag. / horiz. / vert.)	81 / 71 / 21°
Max. diameter of image field	43 mm (1.7")
Flange focal length	F-Mount: 46.5 mm (1.8"); M42-Mount: 45,5 mm
Coverage at close range	219 x 144 mm (8.6 x 5.6"), line 253 mm (9.9")
Image ratio at close range	1:5.9
Filter-thread	M 67 x 0.75
Weight	570 g (1.26 lbs.)
Camera mount	F bayonet, M42, EF

* referring to 35 mm format



Distagon T* 2/28

Technical Specifications

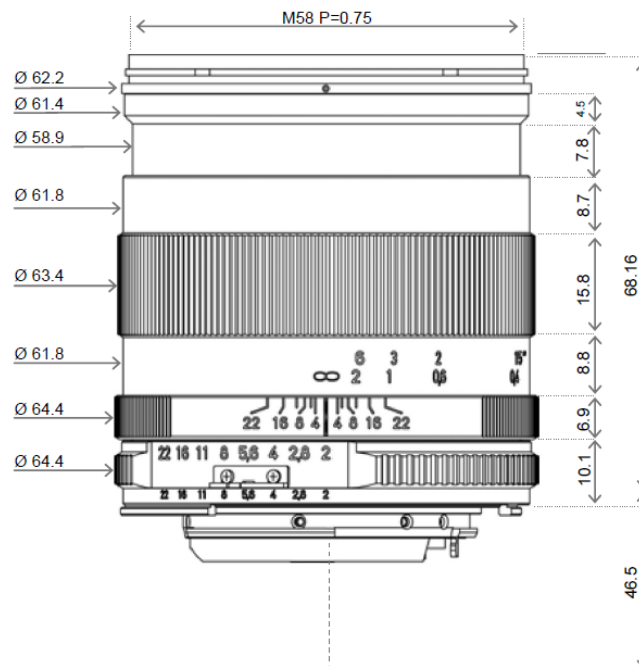


Focal length	28 mm
Aperture range	f/2 – f/22 (1/2 stop intervals)
Number of elements / groups	10 / 8
Min. working distance (object to sensor)	240 mm (0.8 ft.) – ∞
Min. free working distance	120 mm (0.4 ft.) – ∞
Angular field* (diag. / horiz. / vert.)	74 / 65 / 45°
Max. diameter of image field	43 mm (1.7")
Flange focal length	F-Mount: 46.5 mm (1.8"); M42-Mount: 45,5 mm
Coverage at close range	113 x 169 mm (4.5 x 6.7"), line 202 mm (7.9")
Image ratio at close range	1:4.7
Filter-thread	M 58 x 0.75
Weight	500 g (1 lbs.)
Camera mount	F bayonet, M42, EF

* referring to 35 mm format



Distagon T* 2/35

Technical Specifications

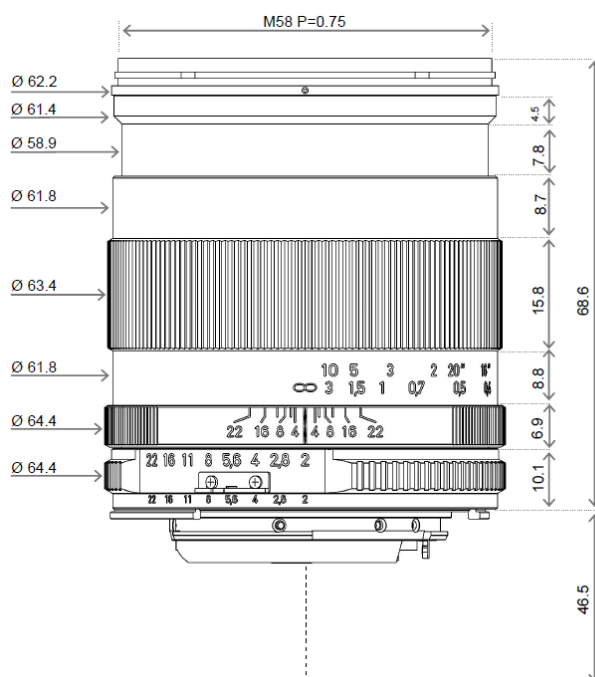

Focal length	35 mm
Aperture range	f/2 – f/22 (1/ 2 stop intervals)
Number of elements / groups	9 / 7
Min. working distance (object to sensor)	300 mm (0.98 ft.) – ∞
Min. free working distance	180 mm (0.59 ft.) – ∞
Angular field* (diag. / horiz. / vert.)	62 / 53 / 37°
Max. diameter of image field	43 mm (1.7")
Flange focal length	F-Mount: 46.5 mm (1.8"); M42-Mount: 45,5 mm
Coverage at close range	128 x 191 mm (5.0 x 7.5"), line 228 mm (8.9")
Image ratio at close range	1:5.3
Filter-thread	M 58 x 0.75
Weight	530 g (1.06 lbs.)
Camera mount	F bayonet, M42, EF

* referring to 35 mm format